

KT tight indoor drop cable

Features

Low bending radius

Optical fibers according to recommendation G.657, with improved performance to macrobending.

G.652 Compatibility

Guaranteed compatibility with G.652 fusion splices.

Low diameter

With 4mm nominal diameter.

Easy manipulation


The cable construction and materials used are tailored to the needs of installation within buildings and homes .

Safety

Use of flame retardants that slow the spread of flame, have low smoke and zero halogen. .

Easy to connect

Compatible with mechanical connections and field-mount connectors.

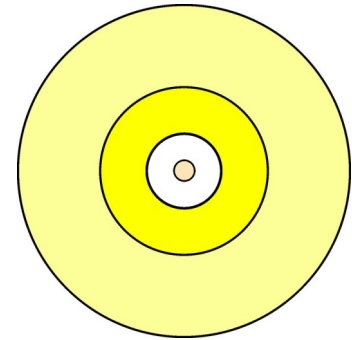

Description

Under FTTH (Fiber to the Home) an important number of standards and solutions are collected, with the aim of bringing new services to homes through optical fiber, without the need of the traditional solutions based on coaxial cable or telephone copper pairs.

One of the main challenges in FTTH network development is laying optical cable inside buildings specially in blocks of flats. These cables provide the distribution of the optical signal inside buildings, typically between the outlet box of each plant and wall socket at the subscriber's home.

The **Indoor Drop cable** contains a single tight buffered fiber (900 micron) optimized against curvatures. Aramid yarns provide longitudinal tension reinforcement and flame retardant cover is ideal for indoor applications. All the plastic materials comply with IEC 332-1, EN 50267-2-2 and EN 50268-1 regarding no flame propagation, no halogen and low smoke emission.

This solution can be complemented with the rest of TELNET FTTH portfolio: drop cables, Splitters, loose tube cable for trunk and access network, termination boxes, splice closures, microcables and patchcords.

NOTE: Different fiber types and configurations available upon request

Technical Specifications

Layer construction

- 1.- Tight buffered fiber 900 micron .
- 2.- Aramid yarns as strength reinforcement elements.
- 3.- LSZH outer sheathing.

Sheath marking

TELNET-RI	YEAR	N° of fibers	Type of fiber	Sheating type	Lenght
TELNET-RI	2010	1 F.O.	10.D - 7X	KT	0001

Fibers color-code


Optical fiber 900 micron	1 White
---------------------------------	------------

Size, weight and structure

F.O. per cable	Nominal Diameter (mm)	Nominal Weight (Kg/Km)
1	4,0	18

Physical and mechanical properties

	Test	Acceptance criteria
Max. Tensile strength	IEC 794-1-E1	800 N
Crush resistance	IEC 794-1-E3	8 N/mm
Impact resistance	IEC 794-1-E4	2 J
Temperature cycling	IEC 794-1-F1	-5°C / +60°C
Bending radius	IEC 794-1-E11, proc. 1	5 x cable diameter
Flame propagation	IEC 332-1	
Halogen emission	UNE 50267-2-2	< 0,5 %; pH > 4,3
Fumes emission	UNE 50268-1	> 50 % transmitted light



Contact Information

Headquarters

Polígono Industrial Centrovía
c/ Buenos Aires, 18
50196 La Muela, Zaragoza
Spain

Tel.: (+34) 976 14 18 00
Fax: (+34) 976 14 18 10
comercial@telnet-ri.es

Commercial office in Madrid

Avda. Menéndez Pelayo, 85 - 1º A
28007 Madrid
Spain

Tel.: (+34) 91 434 39 92
Fax: (+34) 91 434 40 84

Subsidiary in Portugal

NETIBERTEL
Avenida da Liberdade, 110
1269- 046 Lisbon
Portugal