

HEXABAND 1x 698-960 MHz, 1x 1710-2170 MHz, 4x 1710-2690 MHz



- Panel Antenna
- Internal RET

**RF Electrical specifications\***

Frequency Range (MHz)	698-862 880-960		1710-2170	1710-1880 1920-2170 2500-2690					
	R1		B1	Y1 // Y3			Y2 // Y4		
Cluster Name	Over all Tilts:								
	Gain (dBi)	Average	15,8 16,1	16,5	16,9 17,4 17,9	16,1 16,6 16,9			
		Tolerance	0,4 0,4	0,6	0,5 0,5 0,7	0,5 0,5 0,7			
Azimuth Beamwidth (deg)	Average	66 65	64	69 67 63	69 67 63				
	Tolerance	2 1	7	3 3 5	3 3 5				
Elevation Beamwidth (deg)	Average	8,3 7,1	6,8	6,9 6,3 5,3	6,9 6,3 5,3				
	Tolerance	0,8 0,5	0,7	0,5 0,5 0,5	0,5 0,5 0,5				
First Upper Sidelobe level	>15	>15	>15	>15	>15	>15	>15	>15	
Cross Polar Discrimination at Boresight (dB)	>18	>17	>20	>21	>19	>18	>21	>19	
Cross Polar Discrimination Over Sector (dB)	>8	>6	>5	>10	>10	>6	>10	>10	
Front to Back Ratio total power $\pm 30^\circ$ (dB)	>25	>25	>27	>23	>23	>23	>23	>23	
Electrical Downtilt (deg)	0-10		2-12	2-12					
Interband isolation (dB)	>28		>28	>28					
Polarization (deg)	$\pm 45$		$\pm 45$	$\pm 45$					
Impedance ( $\Omega$ )	50		50	50					
VSWR	< 1.5:1		< 1.5:1	< 1.5:1					
PIM, 2x43dB (dB)	< -150		< -150	< -150					
Max. Effective Power per Port (W)	300		300	300					

\* All specifications are subject to change without notice. Refer to TELNET for the most current information.

\* All specifications are based on NGMN recommendations on Base Station Antenna Standards (BASTA).

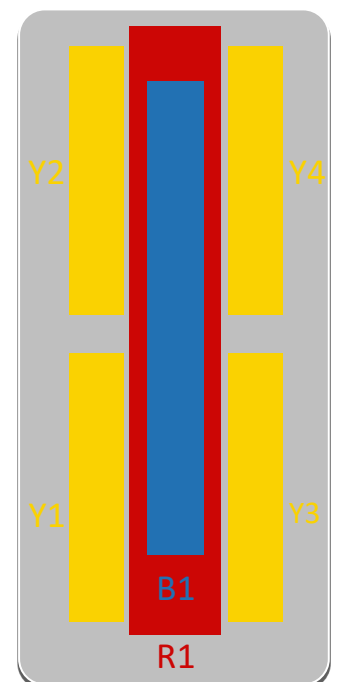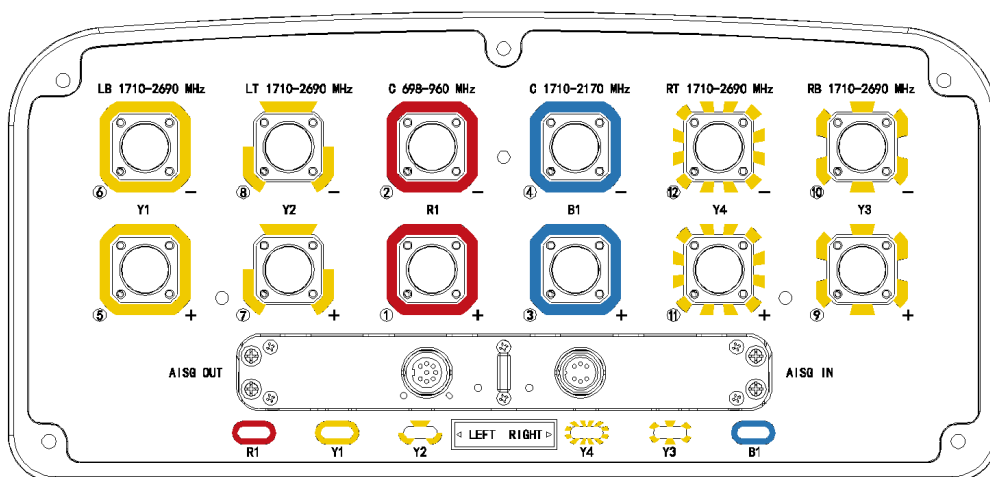

**Mechanical specifications**

Antenna Dimensions: Height/Diameter (mm)	2700 x 380 x 177
Packing Size: Height/Width/Depth (mm)	2940 x 470 x 285
Net Weight (kg)	38
Shipping Weight (kg)	53
Connector Quantity	12
Connector Type	4.3-10 female connectors
Connector Position	Bottom
Survival wind speed (km/h)	200
Azimuth (Full antenna / Per Sector)	N/A
Radome Material	Fiber glass
Radome Colour	White
Lightning Protection	DC grounded

**TELNET RET**

RET Type	Internal
Actuator standalone size: Height / Width / Depth (mm)	Inside the antenna
Actuator installed size: Height / Width / Depth (mm)	Inside the antenna
Power consumption (W)	1–10
Loss of position on power failure	False
Compatible standards	3GPP/AISG 2.0
Replaceability in field	Yes, without removing antenna.
Visual indicator available on tilt change	True
Daisy chain available	True

**Contact Information****TELNET Redes Inteligentes****Headquarters**

Industrial Area Centrovía  
 18 Buenos Aires St.  
 50198 La Muela, Saragossa, Spain  
 Phone: (+34) 976 14 18 00  
 Fax: (+34) 976 14 18 10  
[telnet@telnet-ri.es](mailto:telnet@telnet-ri.es)

**Commercial office in Madrid**

85 Menéndez Pelayo Avenue, 1º A  
 28007 Madrid, Spain  
 Phone: (+34) 91 434 39 92  
 Fax: (+34) 91 434 40 84

**Subsidiary in Portugal**

NETIBERTEL  
 35 Fontes Pereira de Melo Avenue, 14ºD  
 1050 -118 Lisbon, Portugal  
[comercial.pt@telnet-ri.es](mailto:comercial.pt@telnet-ri.es)

**Subsidiary in Mexico**

TELNET Azteca  
 Darwin 74, 3 floor, Col. Anzures  
 Del. Miguel Hidalgo C.P. 11590  
 Mexico  
[comercial.mexico@telnet-ri.es](mailto:comercial.mexico@telnet-ri.es)

[www.telnet-ri.es](http://www.telnet-ri.es)