

## PENTABAND 1x 1710-2690 MHz (65°) + 4x 1710-2690 MHz (33°)



- Panel Antenna
- Internal RET
- HBW = 1x 65° + 4x 33°

### RF Electrical specifications\*

Frequency Range (MHz)		1710-1880			1920-2170			2300-2690		
Cluster Name		Y1 // Y2			Y3 // Y4			Y5		
Gain (dBi)	Over all Tilts:									
	Average	17,1	18,2	18,7	16,7	17,7	18,2	16,7	17,7	
	Tolerance	0,4	0,5	1,1	0,5	0,5	1,2	0,7	0,7	
Azimuth Beamwidth (deg)	Average	36	32	26	36	32	26	70	57	
	Tolerance	1,9	2,3	3,3	1,9	2,3	3,3	5	8	
Elevation Beamwidth (deg)	Average	10,5	9,3	7,5	10,5	9,3	7,5	5,9	4,7	
	Tolerance	0,4	0,7	0,6	0,4	0,7	0,6	0,6	0,3	
Beam Centers, Horizontal (°)		±27			±27			-	-	
First Upper Sidelobe level		>17	>20	>16	>17	>20	>16	>16	>16	
Cross Polar Discrimination at Boresight (dB)		>6	>11	>10	>6	>11	>10	>21	>21	
Front to Back Ratio total power ±30° (dB)		>29	>29	>29	>29	>29	>29	>27	>27	
Interband isolation (dB)		>28	>28	>28	>28	>28	>28	>28	>28	
Polarization (deg)		±45			±45			±45		
Electrical Downtilt (deg)		0-10			0-10			0-10		
Impedance (Ω)		50			50			50		
VSWR		< 1.5:1			< 1.5:1			< 1.5:1		
PIM, 2x43dB (dB)		< -150			< -150			< -150		
Max. Effective Power per Port (W)		250			250			250		

\* All specifications are subject to change without notice. Refer to TELNET for the most current information.

\* All specifications are based on NGMN recommendations on Base Station Antenna Standards (BASTA).

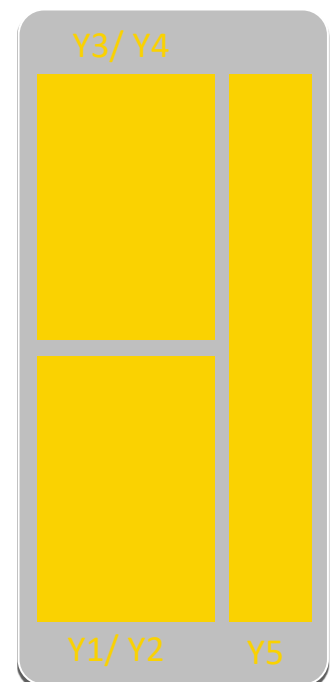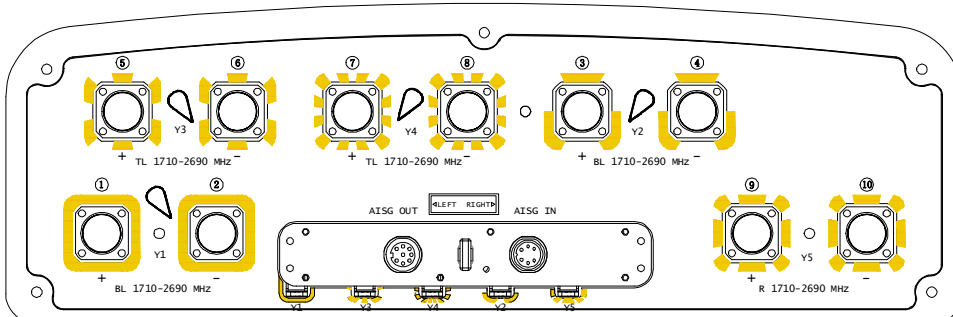

**Mechanical specifications**

Antenna Dimensions: Height/Width/Depth (mm)	2000 x 450 x 145
Packing Size: Height/Width/Depth (mm)	2260 x 545 x 270
Net Weight (kg)	29
Shipping Weight (kg)	38
Connector Quantity	10
Connector Type	4.3-10 female connectors
Connector Position	Bottom
Survival wind speed (km/h)	200
Azimuth (Full antenna / Per Sector)	N/A
Radome Material	Fiber glass
Radome Colour	White
Lightning Protection	DC grounded

**TELNET RET**

RET Type	Internal
Actuator standalone size: Height / Width / Depth (mm)	Inside the antenna
Actuator installed size: Height / Width / Depth (mm)	Inside the antenna
Power consumption (W)	1–10
Loss of position on power failure	False
Compatible standards	3GPP/AISG 2.0
Replaceability in field	Yes, without removing antenna.
Visual indicator available on tilt change	True
Daisy chain available	True

**Contact Information****TELNET Redes Inteligentes  
Headquarters**

Industrial Estate Centrovía  
 18 Buenos Aires St.  
 50198 La Muela, Zaragoza, Spain  
 Phone: (+34) 976 14 18 00  
 Fax: (+34) 976 14 18 10  
[telnet@telnet-ri.es](mailto:telnet@telnet-ri.es)

**Commercial Office in Portugal  
NETIBERTEL**

16 Fontes Pereira de Melo Avenue  
 Galeria Sottomayor, 1050 –121 Lisbon, Portugal  
[comercial.pt@telnet-ri.es](mailto:comercial.pt@telnet-ri.es)

**Commercial Office in Mexico**

TELNET Azteca  
 Darwin 74, 3 floor, Col. Anzures  
 Del. Miguel Hidalgo C.P. 11590  
 Mexico  
[comercial.mexico@telnet-ri.es](mailto:comercial.mexico@telnet-ri.es)

[www.telnet-ri.es](http://www.telnet-ri.es)